

Inspired by History...




Driven by Vision.

We began with the historic Model 9. We improved that distinctive voice with the MA-9S1. And now we present the MA-9S2 as the latest step in our relentless pursuit of sonic accuracy. It defines new horizons in both musical performance and contemporary elegance.

When you first see the MA-9S2, you'll be impressed with its clean yet purposeful look. When you listen, you will realize that the one thing that surpasses the MA-9S2's construction, is it's sound.

MA-9S2 Reference Monoblock Amplifier

Reference Monoblock Amplifier

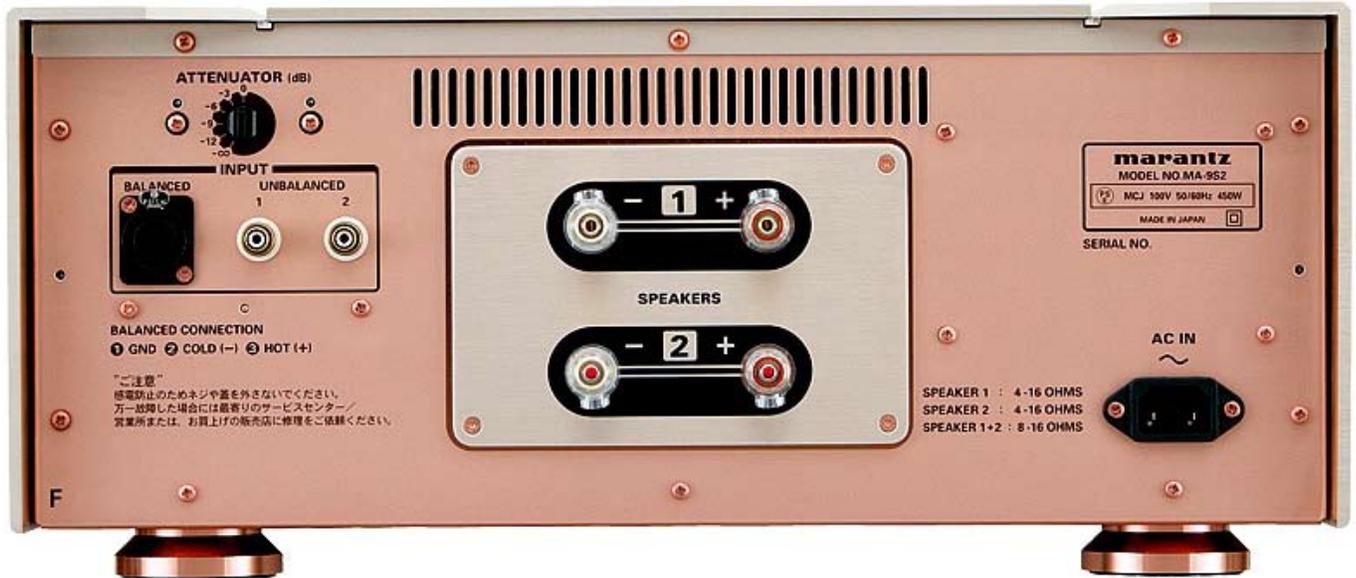

Far more than massive current capability elegantly housed in brushed aluminum, the MA-9S2 thoroughly updates the performance of our original Model 9. It's the culmination of more than a half-century's effort in reproducing audio in the home. Of course, this must be a Marantz. A major undertaking, the engineers at Marantz tore apart the MA-9S1 and redesigned it from the ground up to be even faster, with less noise, and more authority. The MA-9S2 represents over 50 years of expertise in amplifier circuitry, and sincere love of music.

- 300 Watts into 8 Ohms, 600 Watts into 4 Ohms
- >150 Amps Peak Current Supply
- Custom HDAM® SA Modules
- Full Current Feedback Amplifier Stage
- Double Shielded Low noise Toroidal Transformer
- Fully Balanced Amplifier Design
- Choke Input System Power Supply
- Custom Extruded Aluminum Heat Sink
- Heavy Gauge Internal Wiring
- All Copper Plated Chassis and Double Layered Bottom Plate
- Dual WBT® Speaker Outputs

FEATURES

Number of Channels	1
Output Power/Channel (20Hz - 20kHz) @ 8	300W
Power Transformer	Toroidal
Discrete Amplifier Stage	•
Individual Level Adjust	•

IN/OUTPUTS

AUDIO	
Analog L&R In	-
Main Channel Amp In	1/1 (Balanced Mono/Unbalanced Mono)
Bridge Mono Mode	-
Analog L&R Out	-
Headphone Out	-
OTHERS	
D-Bus Remote (RC-5) In/Out	-
External Control	-

SPECIFICATIONS

THD (20Hz - 20kHz, 8	0.01%
Input Sensitivity/Impedance	1.7V/20k
Frequency Response	3Hz - 120kHz (+0, -3dB)
S/N Ratio	120dB

GENERAL

Color	Gold
Front Panel	Aluminum
Remote Control	-
Power Requirement	AC 120V 60Hz
Power Consumption	500W
Dimensions (Inches) W x H x D	18" 1/16" x 7 13/16" x 17 3/4"
Weight (lbs.)	78.9

marantz®
LIFE AMPLIFIED™

*All specifications, dimensions and weights are subject to change without notice. D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.